




## UNC Hex Head Setscrews

Commonly referred to as a setscrew and longer versions are referred to in the United States as a tap bolt. A standard spanner or ratchet is typically used to fit this product. Used for decades on all types of assembly throughout the world. The hex drive allows a higher torque to be applied. Produced to ASME B18.2.1.

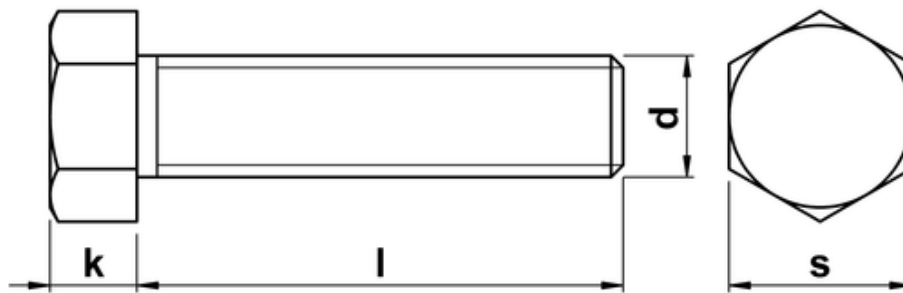

<b>d</b>	<b>tpi</b>	<b>k</b>	<b>s</b>
<b>1-64</b>	64	0.044	0.125
<b>2-56</b>	56	0.050	0.125
<b>3-48</b>	48	0.055	0.188
<b>4-40</b>	40	0.060	0.188
<b>5-40</b>	40	0.070	0.188
<b>6-32</b>	32	0.093	0.250
<b>8-32</b>	32	0.110	0.250
<b>10-24</b>	24	0.120	0.312
<b>12-24</b>	24	0.155	0.312
<b>1/4</b>	20	0.163	0.438
<b>5/16</b>	18	0.211	0.500
<b>3/8</b>	16	0.243	0.562
<b>7/16</b>	14	0.291	0.625
<b>1/2</b>	13	0.323	0.750
<b>9/16</b>	12	0.371	0.812
<b>5/8</b>	11	0.403	0.938
<b>3/4</b>	10	0.483	1.125
<b>7/8</b>	9	0.563	1.312

<b>d</b>	<b>tpi</b>	<b>k</b>	<b>s</b>
1	8	0.627	1.500