




Socket Low Head Cap Screws DIN 7984

Similar to the DIN 912 socket cap screw but with a lower head height and smaller hex drive, the DIN 7984 is used where space is limited. This range is generally manufactured with a partial thread beyond a certain length and nominal diameter combination, but occasionally some stock may include a fully threaded shank at the same combination.

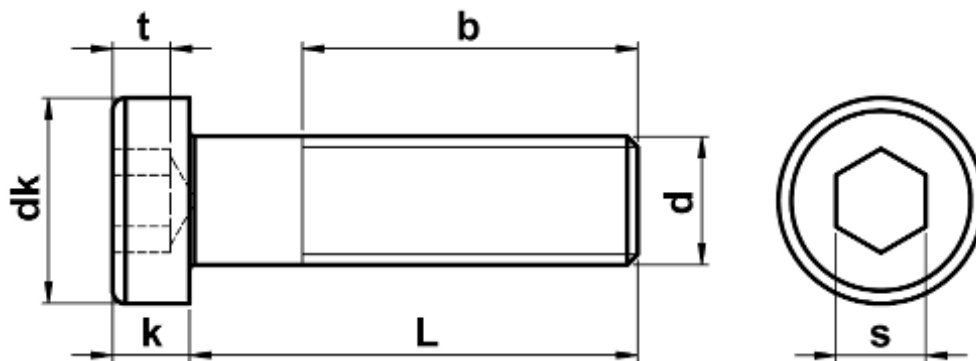

d	thread pitch	dk	k	s	t	b
M3	0.50	5.5	2.0	2	1.5	12
M4	0.70	7.0	2.8	2.5	2.3	14
M5	0.80	8.5	3.5	3	2.7	16
M6	1.00	10.0	4.0	4	3.0	18
M8	1.25	13.0	5.0	5	3.8	22
M10	1.50	16.0	6.0	7	4.5	26
M12	1.75	18.0	7.0	8	5.0	30
M16	2.00	24.0	9.0	12	5.5	38
M20	2.50	30.0	11.0	14.0	7.5	46