




Slotted Cheese Head Machine Screws ISO 1207 (DIN 84)

A machine screw with a traditional slot drive and a flat topped near cylindrical shaped head. Manufactured to ISO 1207 or DIN 84. Please note that due to manufacturing limitations, all nylon variants of these items are only "similar to" and not "in absolute accordance with" the standard specified.

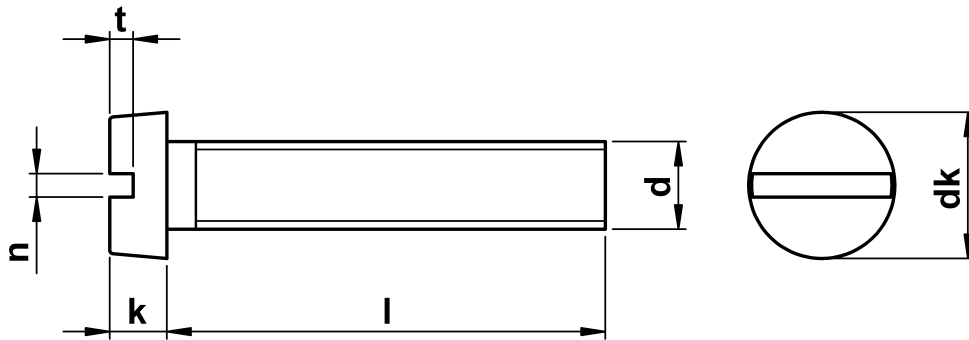

d	thread pitch	dk	k	n	t	s
M1.6	0.35	3.0	1.0	0.40	0.45	0.4X2.0
M2	0.40	3.8	1.3	0.50	0.60	0.5X3.0
M2.5	0.45	4.5	1.6	0.60	0.70	0.6X3.5
M3	0.50	5.5	2.0	0.80	0.85	0.8X4.0
M3.5	0.60	6.0	2.4	1.00	1.00	1.0X5.5
M4	0.70	7.0	2.6	1.20	1.10	1.2X7.0
M5	0.80	8.5	3.3	1.20	1.30	1.2X7.0
M6	1.00	10.0	3.9	1.60	1.60	1.6X9.0
M8	1.25	13.0	5.0	2.00	2.00	2.0X12.0
M10	1.50	16.0	6.0	2.50	2.40	2.5X14.0
M12	1.75	19.0	7.0	2.50	2.80	-