




## Torx Cap Screws With Low Head ISO 14580 (sim. DIN 7984)

Similar to the DIN 912 torx cap screw but with a lower head height and smaller Torx Key (6 lobe drive), the ISO 14580 (DIN 7984) is used where space is limited. This range is generally manufactured with a partial thread beyond a certain length and nominal diameter combination, but occasionally some stock may include a fully threaded shank at the same combination.

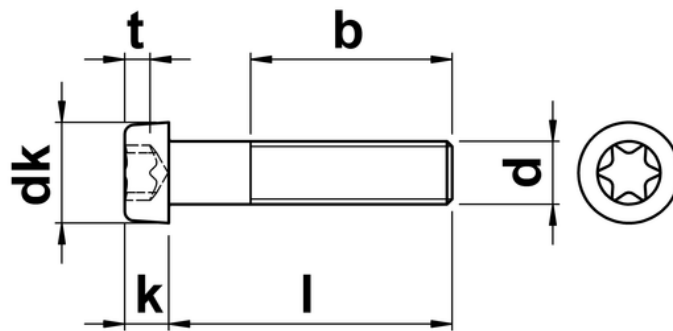

d	thread pitch	dk	k	t min.	t max.	b	s
<b>M3</b>	0.50	5.5	2.0	-	-	12	T 10
<b>M4</b>	0.70	7.0	2.8	-	-	14	T 20
<b>M5</b>	0.80	8.5	3.65	1.52	1.91	16	T 25
<b>M6</b>	1.00	10.0	4.40	1.90	2.29	18	T 30
<b>M8</b>	1.25	13.0	5.80	2.66	3.05	22	T 45
<b>M10</b>	1.75	16.0	6.0	-	-	26	T 50