




Hex Head Self Drilling Screws With Flange

Self Drilling screws are designed to be fitted without the need for a pre-drilled hole, and employs self tapping threads enabling installation in one operation. This variant has a hexagon head, so is designed to be driven in with a standard spanner or ratchet and socket. Only suitable for light applications such as aluminium ducting or 1mm steel. Heavier duty screws are available, please contact us for information.

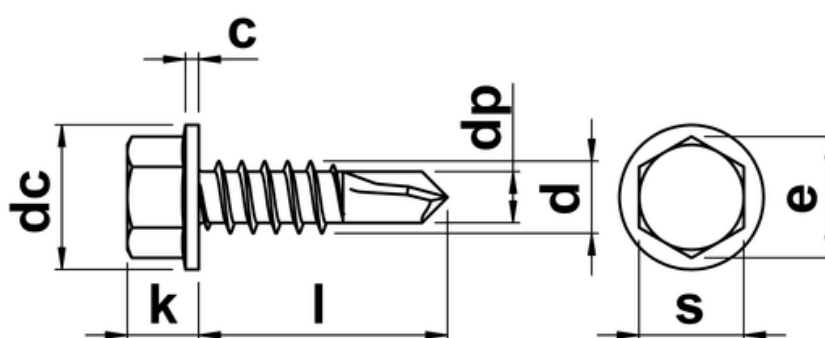

d (gauge)	d (mm)	dp	s	c	k max.	dc max.	e min.
No.6	3.5	2.8	5.5	0.6	3.45	8.3	5.96
No.7	3.9	3.1	5.5	0.6	3.45	8.3	5.96
No.8	4.2	3.6	7	0.9	4.25	8.8	7.59
No.10	4.8	4.1	8	0.9	4.45	10.5	8.71
No.12	5.5	4.8	8	1.0	5.45	11.0	8.71
No.14	6.3	5.8	10	1.0	6.45	13.2	10.95