



STICK FIT[®]



Ulti-Mate[®]

Stick-Fit[®] Wood Screws






STICK—
FIT[®]

ACR[®]
ANTI-CAMOUT
RECESS

Patented PSD[®] recess featuring STICK-FIT[®] and ACR[®]
technology enabling stable, one-handed driving

LENGTH (L)	THREAD LENGTH (TL)
12	FULL
16	FULL
20	FULL
25	FULL
30	FULL
35	FULL
40	FULL
45	2/3 OF 'L'
50	2/3 OF 'L'
60	2/3 OF 'L'
70	2/3 OF 'L'
80	2/3 OF 'L'
90	2/3 OF 'L'
100	2/3 OF 'L'
110	2/3 OF 'L'
120	2/3 OF 'L'
130	2/3 OF 'L'
140	2/3 OF 'L'
150	100
160	100
180	100
200	100
220	100
240	100

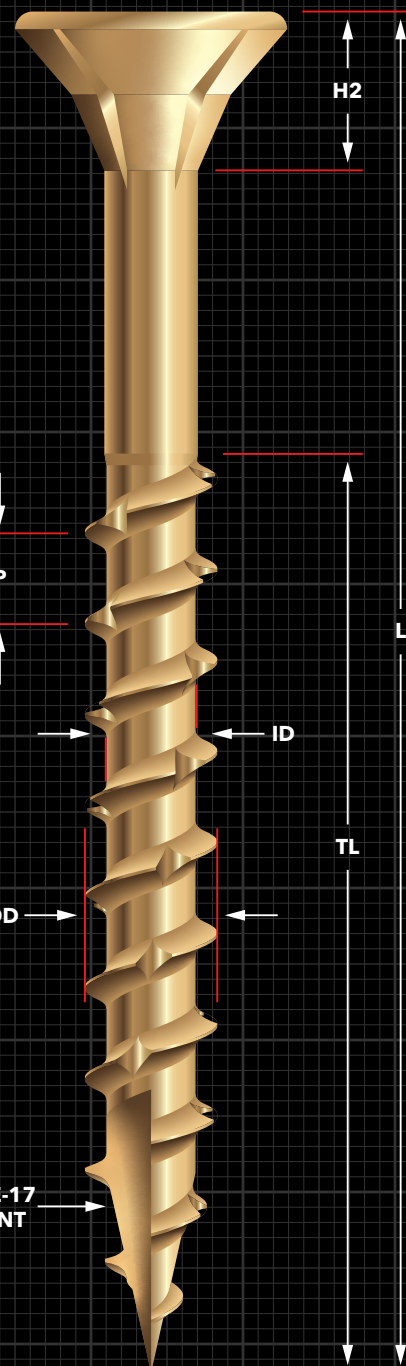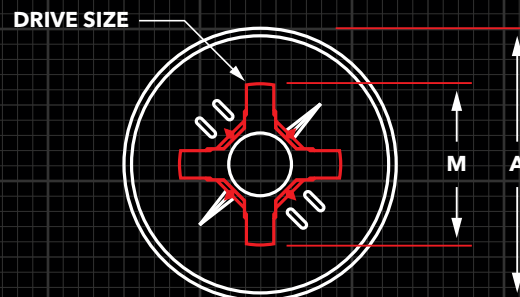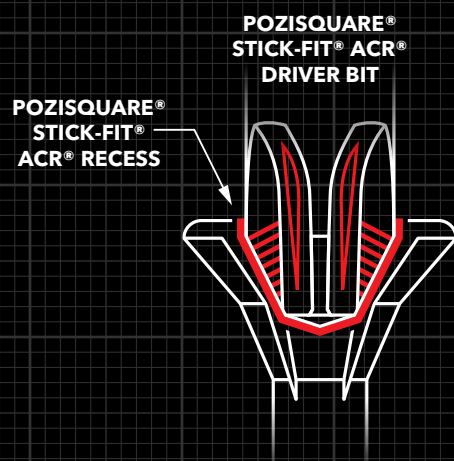

SCREW SIZE	DRIVE SIZE	A	H2	OD	ID	M	P
M2.5	PSD 0-1	5.10	3.37	2.50	1.70	3.25	1.48
M3.0	PSD 0-1	5.50	3.39	3.00	1.95	3.34	1.78
M3.5	PSD 1-2	7.00	3.94	3.50	2.28	4.51	2.08
M4.0	PSD 1-2	8.00	4.14	4.00	2.86	5.01	2.37
M4.5	PSD 1-2	9.00	5.01	4.50	3.11	5.34	2.67
M5.0	PSD 2-2	10.00	5.17	5.00	3.41	5.94	2.97
M6.0	PSD 3-3	12.00	7.67	6.00	3.90	7.31	3.56

All dimensions in Millimeters.

When thread length (TL) is 30mm or above, screw features a Type-17 point.

- Patented **PSD®** recess featuring **STICK-FIT®** and **ACR®** technology enabling stable, one-handed driving.
- Self-countersinking reinforced double angle head.
- Heavy-duty core for added strength.
- Wax lubricant coating for low torque insertion.
- Type-17 'slash' point to cut through the hardest timber. No predrilling required.
- **STICK-FIT®** Driver Bit inside every box of **Ulti-Mate®**

Ulti-Mate®
Stick-Fit® Wood Screws

UK CA CE
BS EN 14592:2008
+A1:2012

THE
Phillips Screw®
COMPANY
Innovating since 1935

ULTI-MATE®, PSD®, STICK-FIT®, and ACR® are trademarks of The Phillips Screw Company. Patented and Patent Pending.