



STICK FIT[®]



Ulti-Mate[®]

Stick-Fit[®] Drywall Screws



STICK
FIT[®]

ACR[®]
ANTI-CAMOUT
RECESS


Patented **PSD[®]** recess featuring **STICK-FIT[®]** and **ACR[®]**
technology enabling stable, one-handed driving

LENGTH (L)	THREAD LENGTH (TL)
25	19
32	26
38	32
42	36
50	44
60	54
75	69
100	94

SCREW SIZE	DRIVE SIZE	A	H2	OD	ID	M	P
3.5	PSD 1-2	8.20	6.00	3.50	2.13	4.73	1.69
4.2	PSD 1-2	8.20	6.00	4.20	2.68	4.73	1.69
4.8	PSD 1-2	9.20	6.00	4.80	3.40	5.00	2.12

All dimensions in Millimeters.

- ✚ Patented **PSD®** recess featuring **STICK-FIT®** and **ACR®** technology enabling stable, one-handed driving.
- ✚ Designed to securely fix plasterboard to both timber batons and metal stud framing.
- ✚ Twin Threaded with a Bugle Head.
- ✚ Black Phosphate coating.
- ✚ Sharp point for rapid starting with minimum force.
- ✚ **STICK-FIT®** Driver Bit inside every box of **Ulti-Mate®**

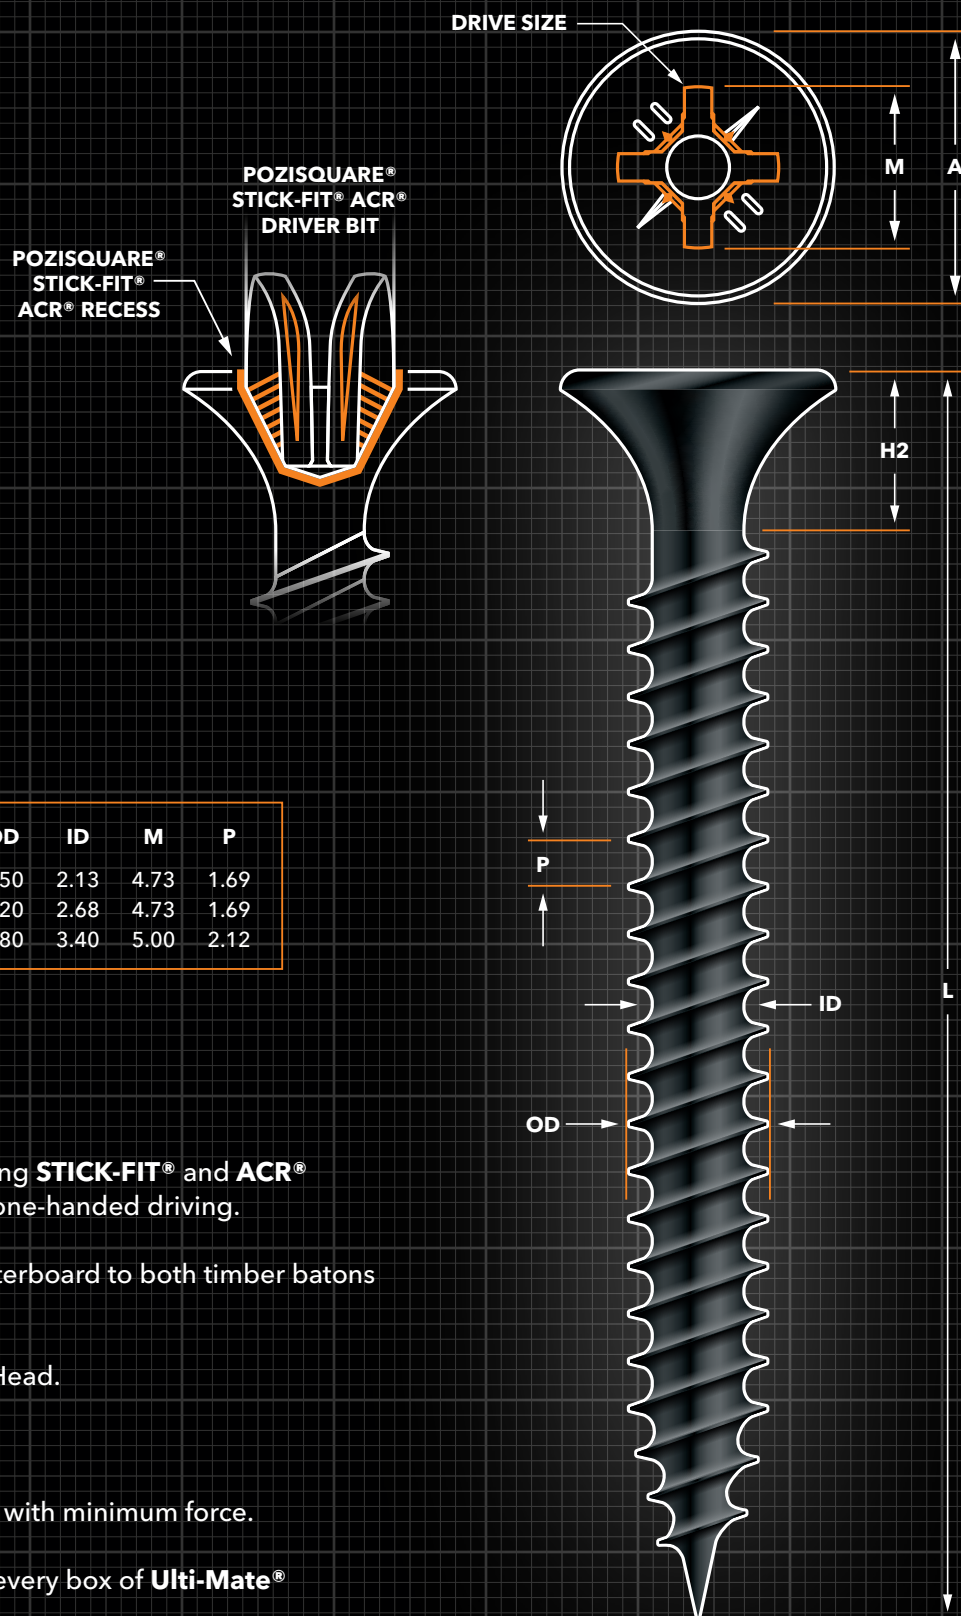

Ulti-Mate®
Stick-Fit® Drywall Screws

UK CA CE
BS EN 14566:2008
+A1:2009

THE
Phillips Screw®
COMPANY
Innovating since 1935

ULTI-MATE®, PSD®, STICK-FIT®, and ACR® are trademarks of The Phillips Screw Company. Patented and Patent Pending.